


ADJACENT SOFTSCAPE (GARDEN BED,
TREE PLANTING, TURF ETC)

90X90X6MM HOT DIPPED
GALVANISED STEEL ANGLE. FULL
WELD AT JOINTS, GRIND FLUSH
AND TREAT TO PREVENT RUST
COVER STEEL ANGLE WITH WET
SAND/CEMENT AND LAY PAVER ON TOP

GRANITE PAVING

FIX STEEL TO CONCRETE SLAB WITH
M10 THREADED ROD EPOXY FIXED
INTO SLAB AT 1.5M CENTRES. MAX
200mm DISTANCE FROM ENDS. ALL
FIXINGS TO BE HOT DIPPED GAL OR
STAINLESS STEEL

EXISTING SUBGRADE

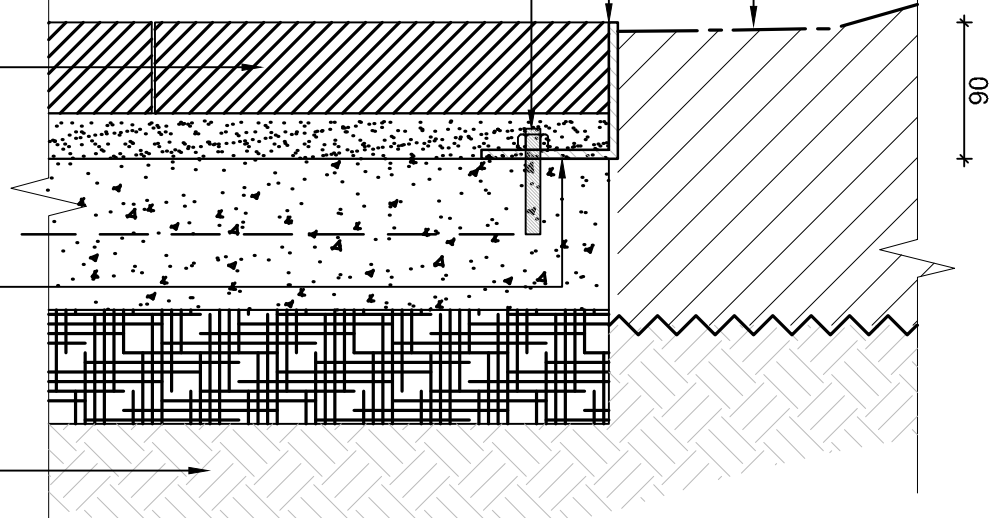

PV 6.1 STEEL ANGLE TO STRAIGHT GARDEN BED EDGE - TYPICAL
SCALE 1:5 AT A4

ADJACENT SOFTSCAPE (GARDEN BED,
TREE PLANTING, TURF ETC)


180X6MM HOT DIPPED GALVANISED
STEEL. FULL WELD AT JOINTS. GRIND
FLUSH AND TREAT TO PREVENT RUST

WET SAND/CEMENT WITH
PAVER ON TOP

GRANITE PAVING

FIX STEEL TO CONCRETE SLAB WITH
M10 THREADED ROD EPOXY FIXED
INTO SLAB AT 1M CENTRES. MIN 50MM
CONCRETE COVER. MAX 200MM
DISTANCE FROM ENDS. HOLES
DRILLED MIN 50MM CLEARANCE FROM
EDGE. ALL FIXINGS TO BE HOT DIPPED
GAL OR STAINLESS STEEL

EXISTING SUBGRADE

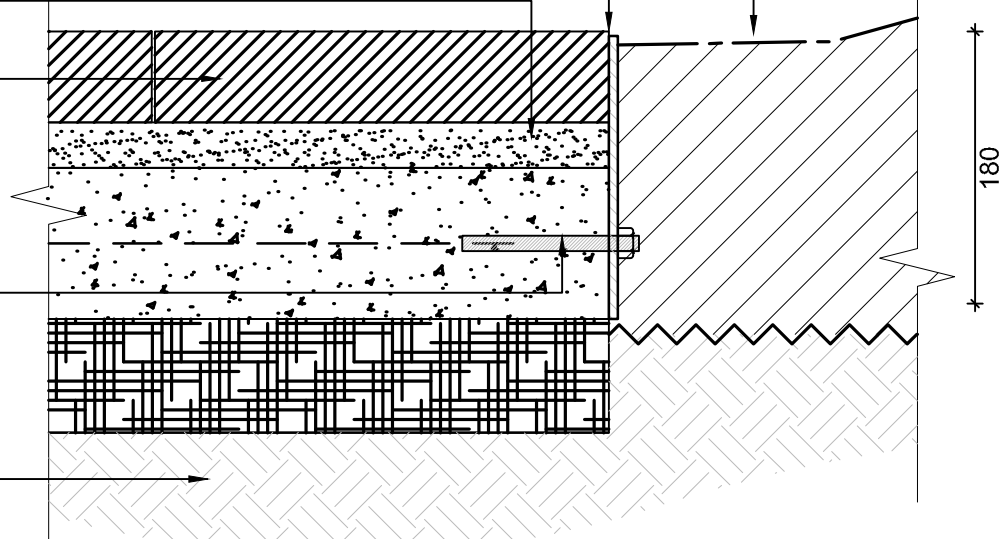

PV 6.2 STEEL FLAT TO CURVED GARDEN BED EDGE - TYPICAL
SCALE 1:5 AT A4

COPYRIGHT © 2011 City of Ryde - ALL RIGHTS RESERVED
No part of this document shall be modified or reproduced without written permission.
Go to www.ryde.nsw.gov.au/disclaimer to view the Standard Drawings Disclaimer

COPYRIGHT © 2011 City of Ryde - ALL RIGHTS RESERVED - No part of this document shall be reproduced without written permission.



STANDARD DRAWING
STEEL EDGE TYPES
GRANITE PAVING TO
GARDEN BED

APPROVED VP DESIGN MANAGER	DATE 28/06/16
DRAWING NUMBER PV6.1 & PV6.2	REVISION D