
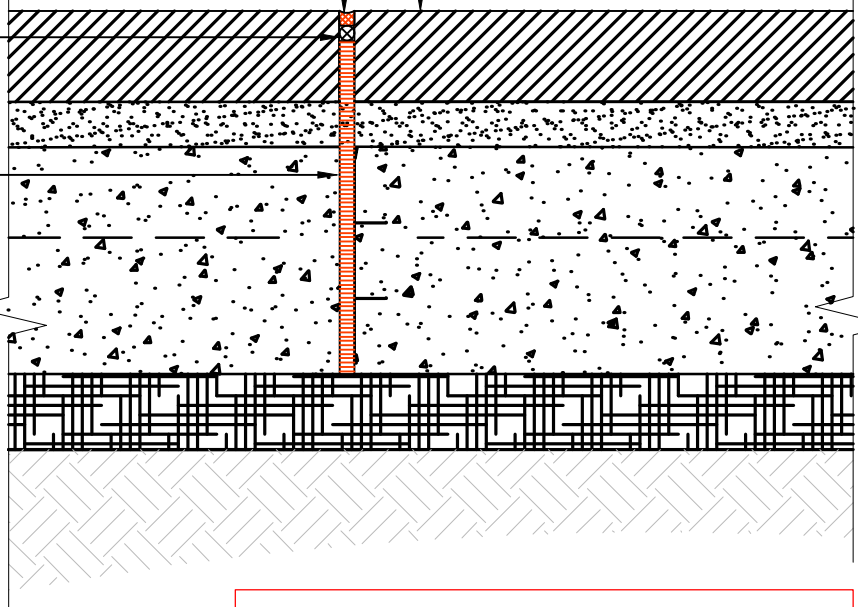


PAVEMENT TYPE: GRANITE
REFER PV1.2

JOINT SEALANT (PJ). COLOUR BLACK

FOAM BACKING ROD TO ISOLATION
JOINT DEPTH. GRANITE PAVING JOINT
TO ALIGN WITH LOCATION OF
ISOLATION JOINT (REFER JOINTING
PLANS). ENSURE JOINTING SAND IS
CLEANED OUT PRIOR TO INSTALLING

ISOLATION JOINT - CONNOLLY JOINT OR
APPROVED EQUIVALENT. EXTEND
ISOLATION JOINT 60-70mm ABOVE
SURFACE OF BLINDING SLAB TO ALIGN
JOINT IN GRANITE PAVERS




PV 3.3.1 GRANITE ISOLATION JOINT (IJ)
SCALE 1:5 AT A4

NOTES:
REFER JOINTING PLAN FOR SETOUT & JOINT TYPE / LOCATION.
ALL SURFACE JOINTS AS INDICATED ON FINISHES PLANS. SEEK
CLARIFICATION FROM COUNCIL'S LANDSCAPE ARCHITECT IF
REQUIRED

PAVEMENT TYPE: CONCRETE
REFER PV1.1

SAW CUT 3-5mm WIDE AND
MINIMUM 40mm DEEP

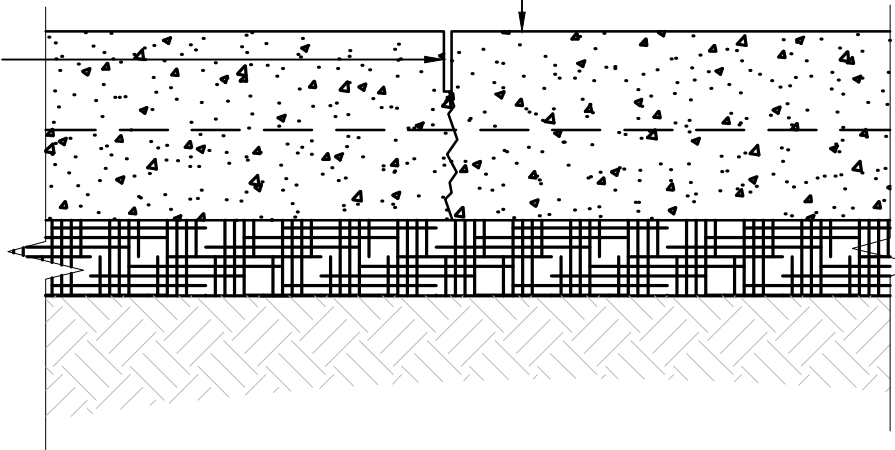

PV 3.4 CONCRETE CONTROL JOINT (CJ)
SCALE 1:5 AT A4

NOTES:
REFER JOINTING PLAN FOR SETOUT & JOINT TYPE / LOCATION.
SAW CUTS TO BE STRAIGHT AND CONTINUOUS

COPYRIGHT © 2011 City of Ryde - ALL RIGHTS RESERVED
No part of this document shall be modified or reproduced without written permission.
Go to www.ryde.nsw.gov.au/disclaimer to view the Standard Drawings Disclaimer



STANDARD DRAWING
JOINT TYPES

APPROVED VP DESIGN MANAGER	DATE 15/12/17
DRAWING NUMBER	REVISION
PV3.3.1 & PV3.4	E